

CONCEAL THE PUBLIC KEY PK USING RANDOM VALUE RAN 30 SEND REQUEST FOR ACCESS TO CONTENT RIGHTS FROM FIRST USER TO CONTENT PROVIDER, INCLUDING CONTENT 32 IDENTIFIER CR\_ID, CONCEALED PUBLIC KEY H(PK//RAN), SECRET SECURITY IDENTIFIER AND RANDOM VALUE RAN CHECK VALIDITY OF SECRET SECURITY IDENTIFIER 34 GENERATE AND SIGN USAGE RIGHT CERTIFICATE UR INCLUDING CONTENT IDENTIFIER CR\_ID, CONCEALED PUBLIC KEY H(PK//RAN) AND RANDOM VALUE RAN USED FOR CONCEALING PUBLIC KEY 36 SEND USAGE RIGHT CERTIFICATE UR AND CONTENT FROM **CONTENT PROVIDER TO USER** 38 FIG.2

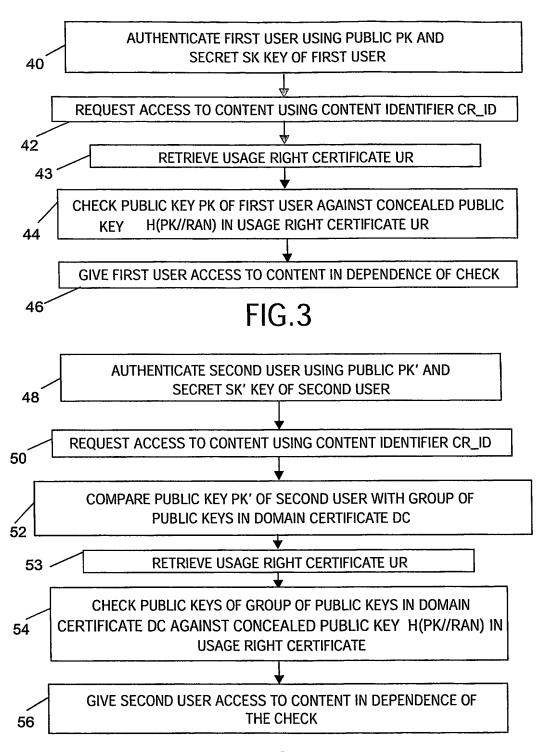


FIG.4

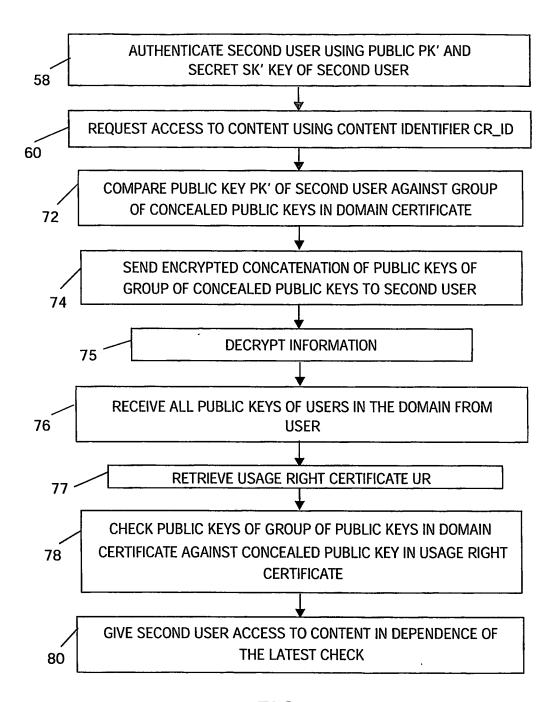


FIG.5

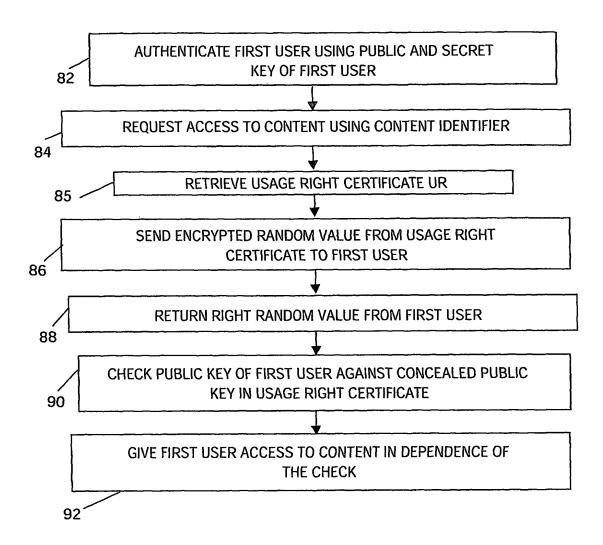


FIG.6

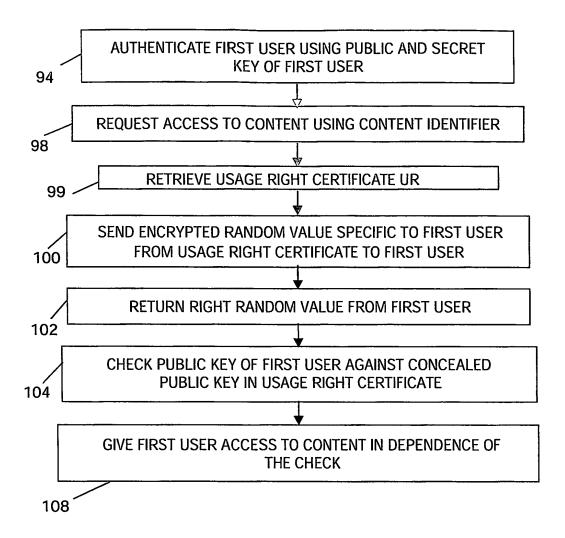


FIG.7




FIG.8




FIG.9

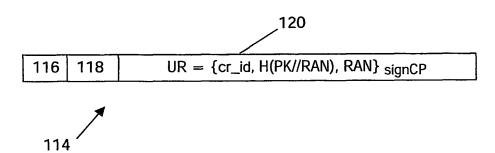


FIG.10